



Светильник линейный
WALL WASHER LG XQ-6332



Product characteristics


- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V/AC220V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: Constant Voltage
- Angle: 20°/45°/10°/60°
- 8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: L1000*W63*H33mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge

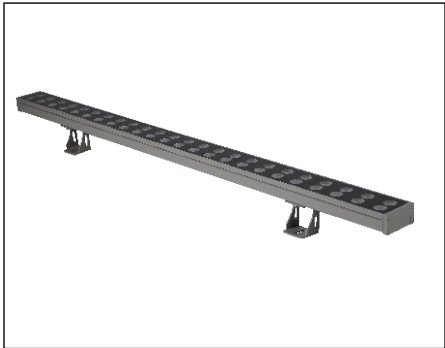

Installation size

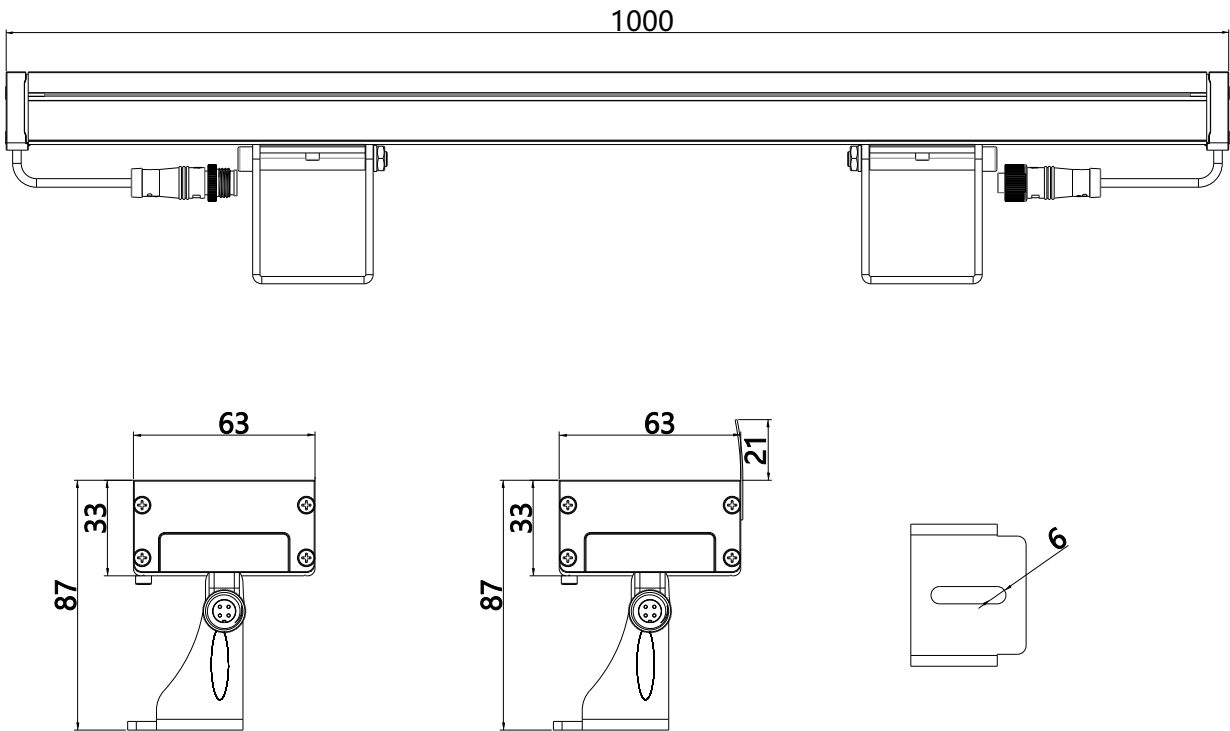

Item	Power	Quantity	Colour	Voltage	Type	Protection
XQ-6332	48W	48PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
XQ-6332	48W	48PCS	RGB/RGBW	DC24V	/	IP65
XQ-6332	96W	48PCS	RGB/RGBW	DC24V	/	IP65
XQ-6332	54W	54PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
XQ-6332	54W	54PCS	RGB/RGBW	DC24V	/	IP65
XQ-6332	72W	72PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
XQ-6332	72W	72PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

