



Светильник линейный
WALL WASHER LG XQ-3222



Product characteristics




- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: Constant Voltage
- Angle: 20°/45°/10°/60°
- 8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: L1000*W32*H22mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge

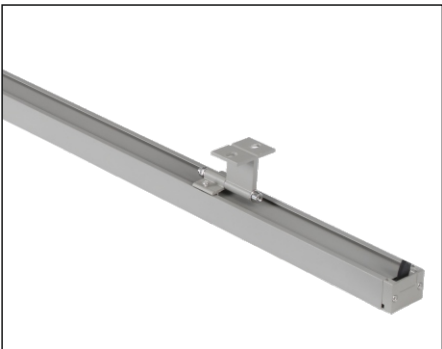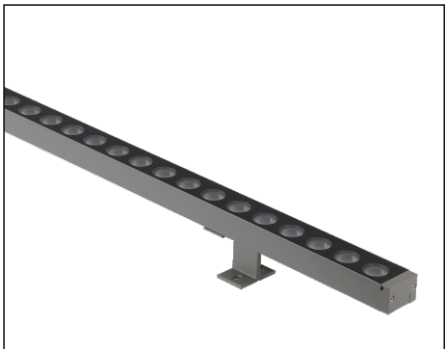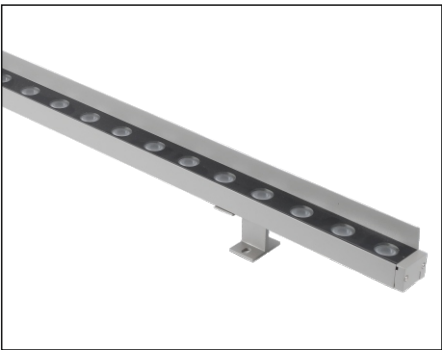

Installation size

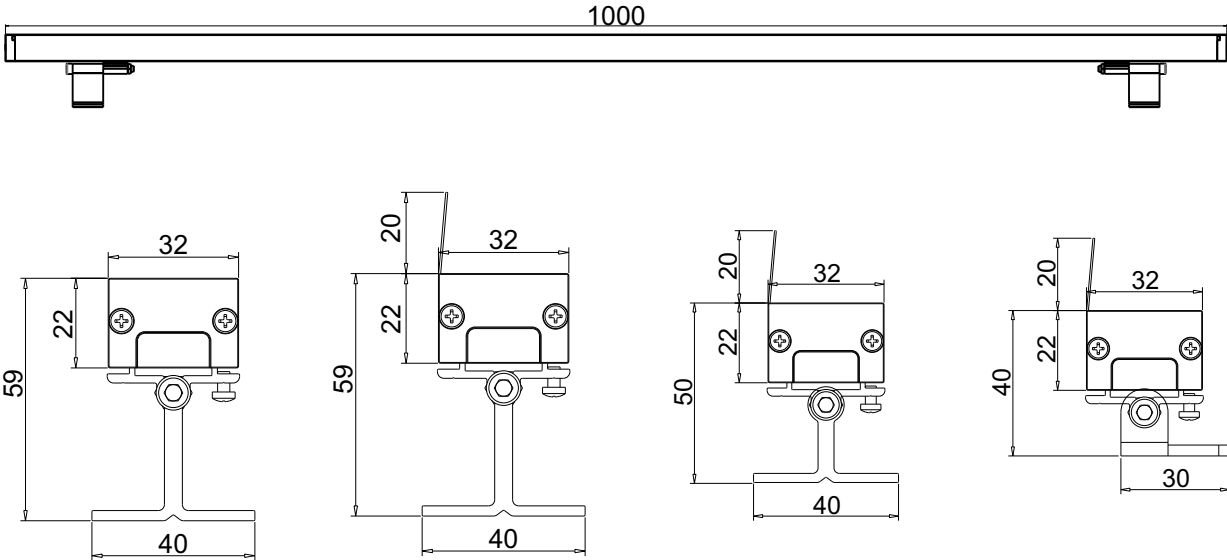

Item	Power	Quantity	Colour	Voltage	Type	Protection
XQ-3222	18W	18PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-3222	24W	24PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-3222	36W	36PCS	Mono	DC24V	CREE/OSRAM	IP65

Light distribution curve

