



Прожектор архитектурный
FLOOD LG TG-A1/G1



Product characteristics

- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter



- Voltage: DC24V/AC220V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: constant voltage
- Angle: 3°/5°/8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: L70*W70*H103mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge



Installation size

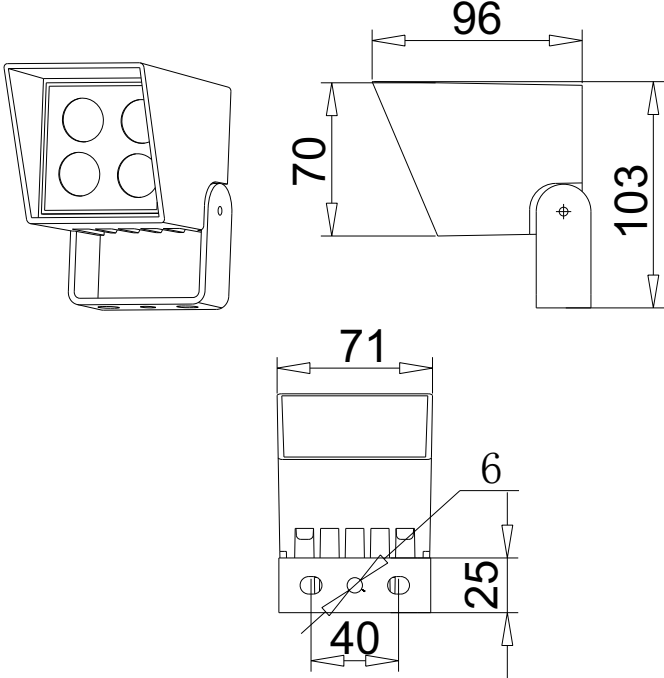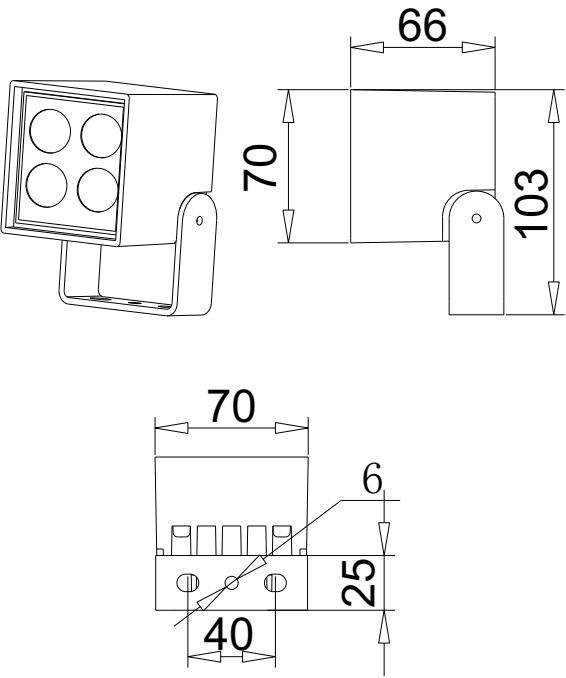

Item	Power	Quantity	Colour	Voltage	Type	Protection
TG-A1	5W	1PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TG-A1	5W	1PCS	RGB/RGBW	DC24V	/	IP65
TG-A1	6W	3PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TG-A1	6W	3PCS	RGB/RGBW	DC24V	/	IP65
TG-A1	8W	4PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TG-G1	8W	4PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

