




Светильник линейный
WALL WASHER LG XQ-5236

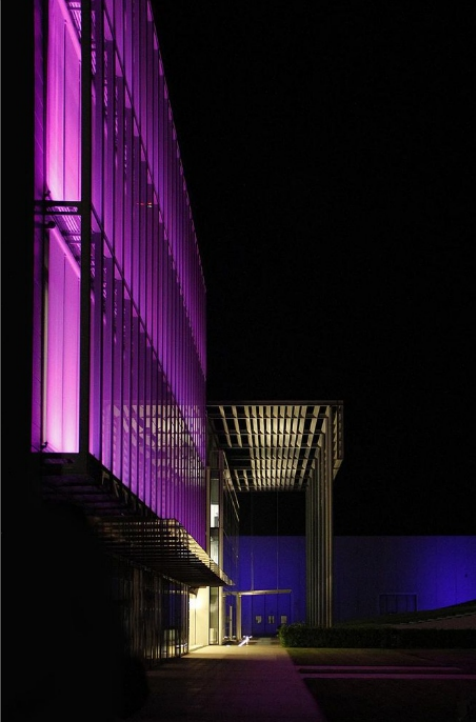

Product characteristics

- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V/AC220V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: Constant Voltage
- Angle: 3°/5°/8°
- Control: ON-OFF/DMX512
- Size: L1000*W52*H36mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge



Installation size

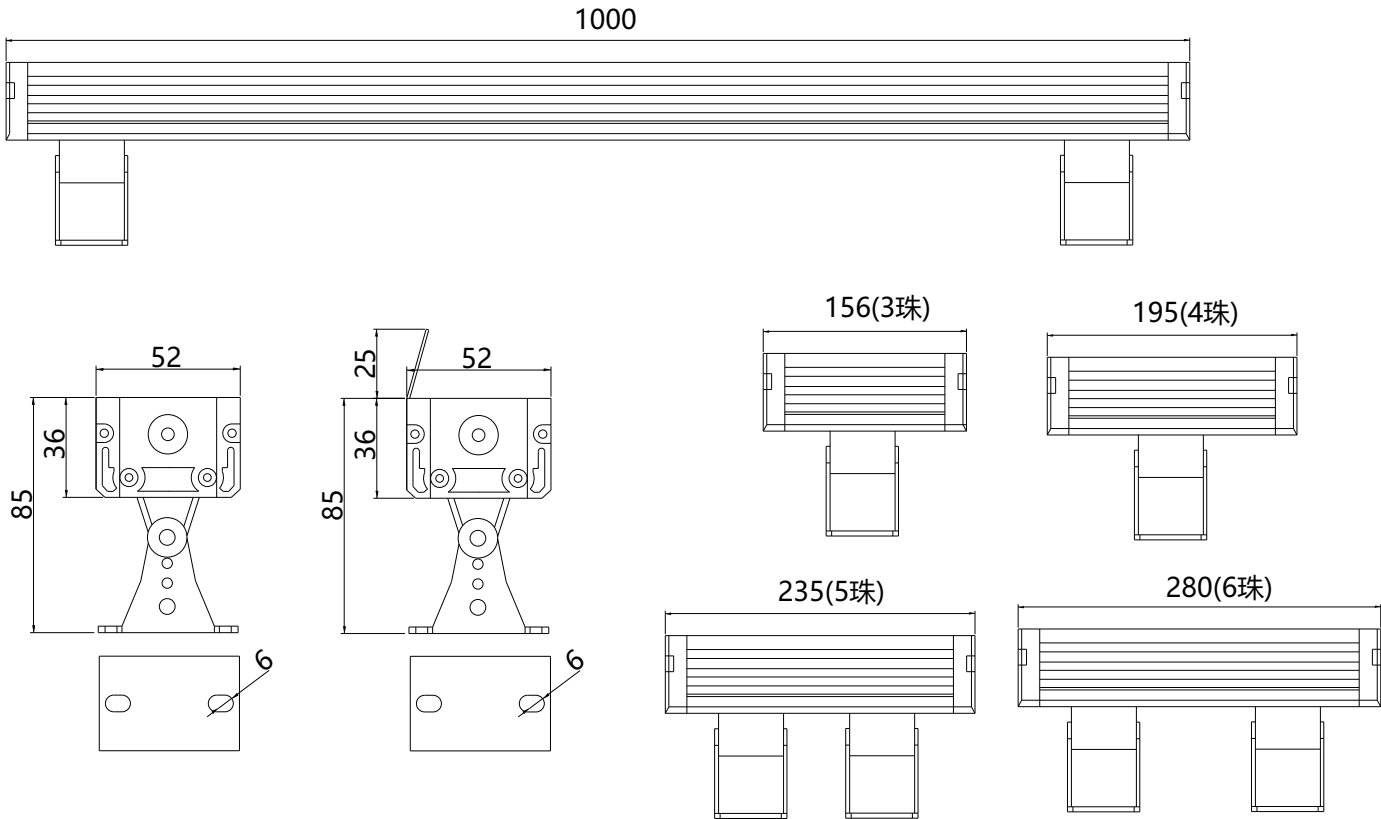

Item	Power	Quantity	Colour	Voltage	Type	Protection
XQ-5236E	36W	18PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
XQ-5236E	36W	18PCS	RGB/RGBW	DC24V	/	IP65
XQ-5236E	48W	24PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
XQ-5236E	48W	24PCS	RGB/RGBW	DC24V	/	IP65
XQ-5236A	6W	3PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236A	9W	3PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236B	8W	4PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236B	12W	4PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236C	10W	5PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236C	15W	5PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236D	12W	6PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-5236D	18W	6PCS	Mono	DC24V	CREE/OSRAM	IP65

Light distribution curve

