



Светильник линейный  
WALL WASHER LG XQ-3828



Product characteristics

- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V/AC220V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: Constant Voltage
- Angle: 20°/45°/10°/60°
- 8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: L1000\*W38\*H32mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge



Installation size

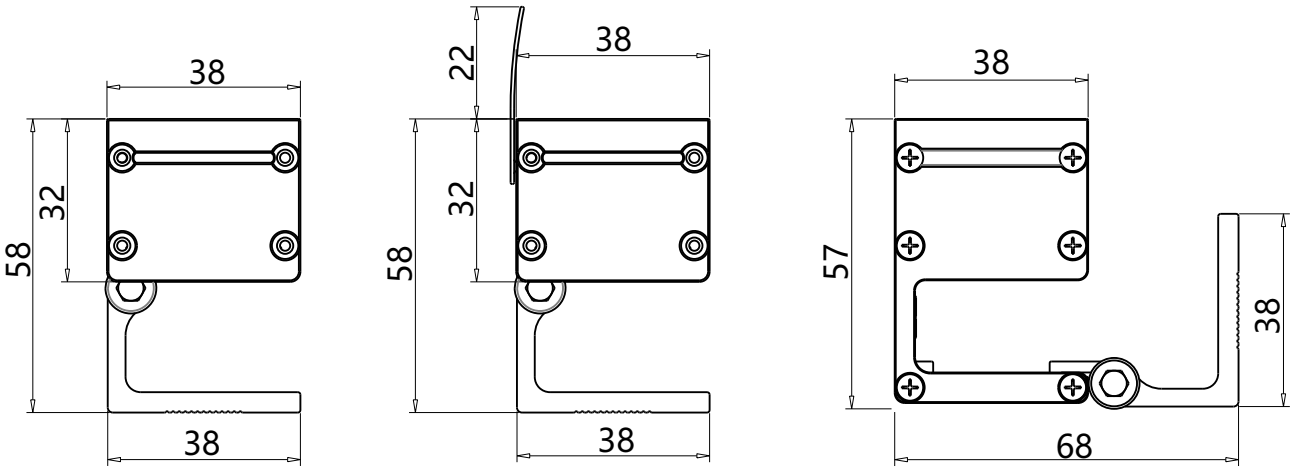

| Item    | Power | Quantity | Colour   | Voltage      | Type       | Protection |
|---------|-------|----------|----------|--------------|------------|------------|
| XQ-3828 | 18W   | 18PCS    | Mono     | DC24V/AC220V | CREE/OSRAM | IP65       |
| XQ-3828 | 18W   | 18PCS    | RGB/RGBW | DC24V        | /          | IP65       |
| XQ-3828 | 24W   | 24PCS    | Mono     | DC24V/AC220V | CREE/OSRAM | IP65       |
| XQ-3828 | 24W   | 24PCS    | RGB/RGBW | DC24V        | /          | IP65       |
| XQ-3828 | 36W   | 36PCS    | Mono     | DC24V/AC220V | CREE/OSRAM | IP65       |
| XQ-3828 | 36W   | 36PCS    | RGB/RGBW | DC24V        | /          | IP65       |
| XQ-3828 | 48W   | 48PCS    | RGB/RGBW | DC24V        | /          | IP65       |

Light distribution curve

