



Светильник ландшафтный
BURIED LG DM-A1



Product characteristics


- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V/
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: constant voltage
- Angle: 24°
- Control: ON-OFF/DMX512
- Size: Ø42*H73mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge

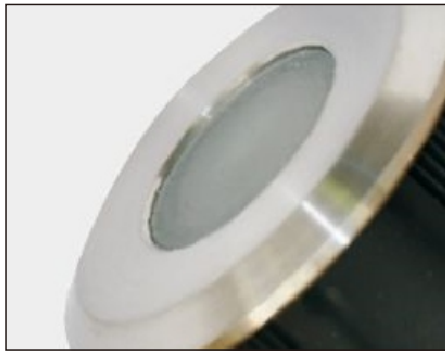

Installation size

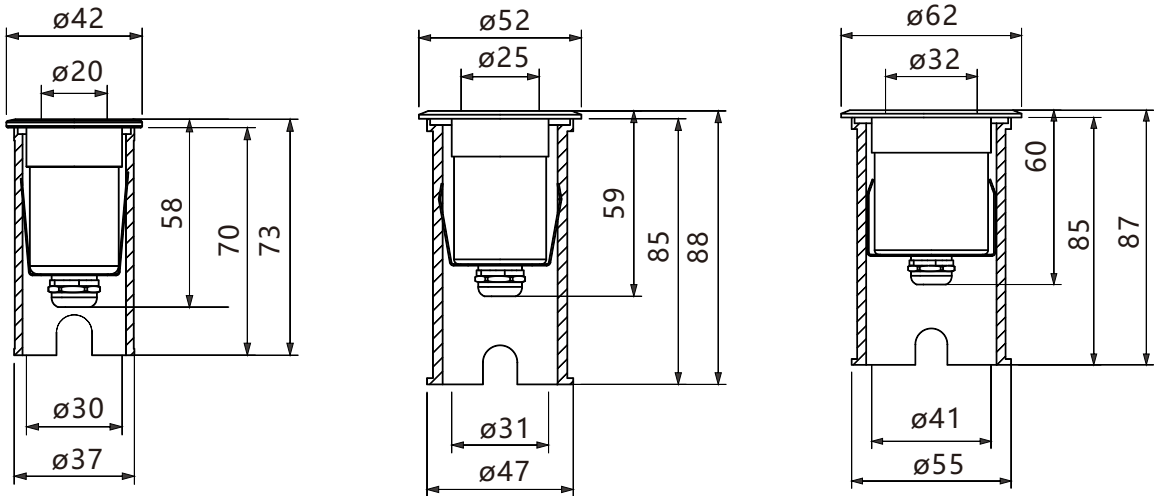

Item	Power	Quantity	Colour	Voltage	Type	Protection
DM-A1A	1W	1PCS	Mono	DC24V	CREE/OSRAM	IP65
DM-A1A	3W	1PCS	Mono	DC24V	CREE/OSRAM	IP65
DM-A1B	1W	1PCS	Mono	DC24V	CREE/OSRAM	IP65
DM-A1B	3W	1PCS	Mono	DC24V	CREE/OSRAM	IP65
DM-A1C	1W	1PCS	Mono	DC24V	CREE/OSRAM	IP65
DM-A1C	3W	1PCS	Mono	DC24V	CREE/OSRAM	IP65

Light distribution curve

