



Светильник настенный
STEP LG TJ-B1/B2



Product characteristics

- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter



- Voltage: DC24V/AC220V
- Grade: I /III
- LED: CREE/OSRAM
- Drive: constant voltage
- Angle: 8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: L109*W75*H57mm

Applicable scenario

Building exterior wall,
green landscape, bridge



Installation size

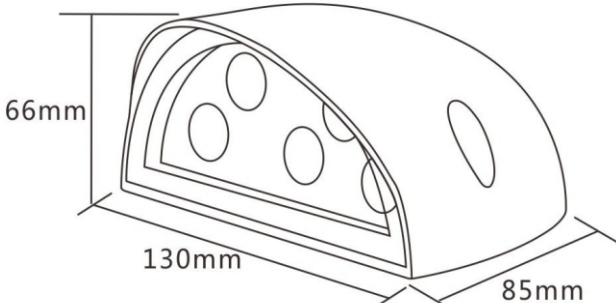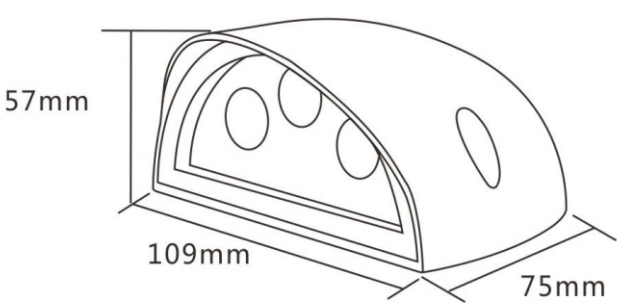

Item	Power	Quantity	Colour	Voltage	Type	Protection
TJ-B1	3W	3PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TJ-B1	3W	3PCS	RGB/RGBW	DC24V	/	IP65
TJ-B1	6W	3PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TJ-B1	6W	3PCS	RGB/RGBW	DC24V	/	IP65
TJ-B2	6W	6PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TJ-B2	6W	6PCS	RGB/RGBW	DC24V	/	IP65
TJ-B2	12W	6PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
TJ-B2	12W	6PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

