



Светильник линейный
WALL WASHER LG QK-3566



Product characteristics


- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: Constant Voltage
- Angle: 20°/45°/10°/60°
- 8°/15°/30°/45°/60° + 110°
- Control: ON-OFF/DMX512
- Size: L1000*W35*H66mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge

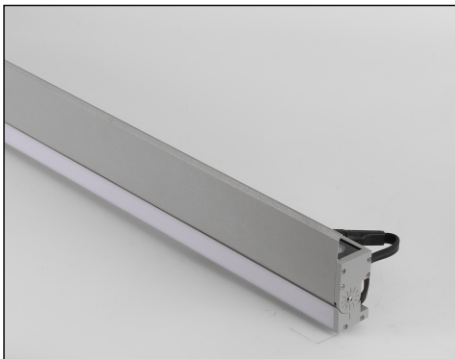

Installation size

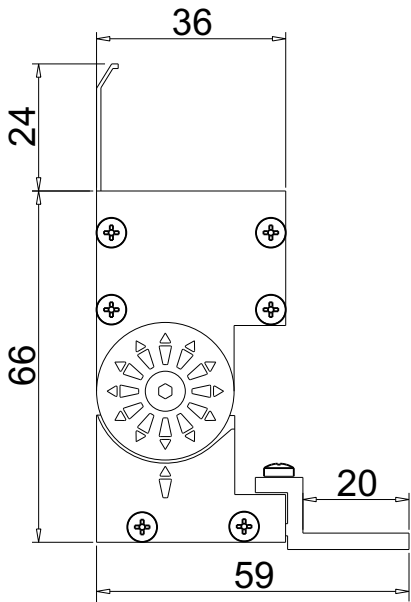

Item	Power	Quantity	Colour	Voltage	Type	Protection
XQ-3566	18W+12W	18+48PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-3566	18W+12W	18+48PCS	RGB/RGBW	DC24V	/	IP65
XQ-3566	24W+12W	24+48PCS	Mono	DC24V	CREE/OSRAM	IP65
XQ-3566	24W+12W	24+48PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

