



Прожектор архитектурный
SPOT LG TS-B6/B7



Product characteristics

- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: constant voltage
- Angle: 8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: Ø72*W74*H115mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge



Installation size

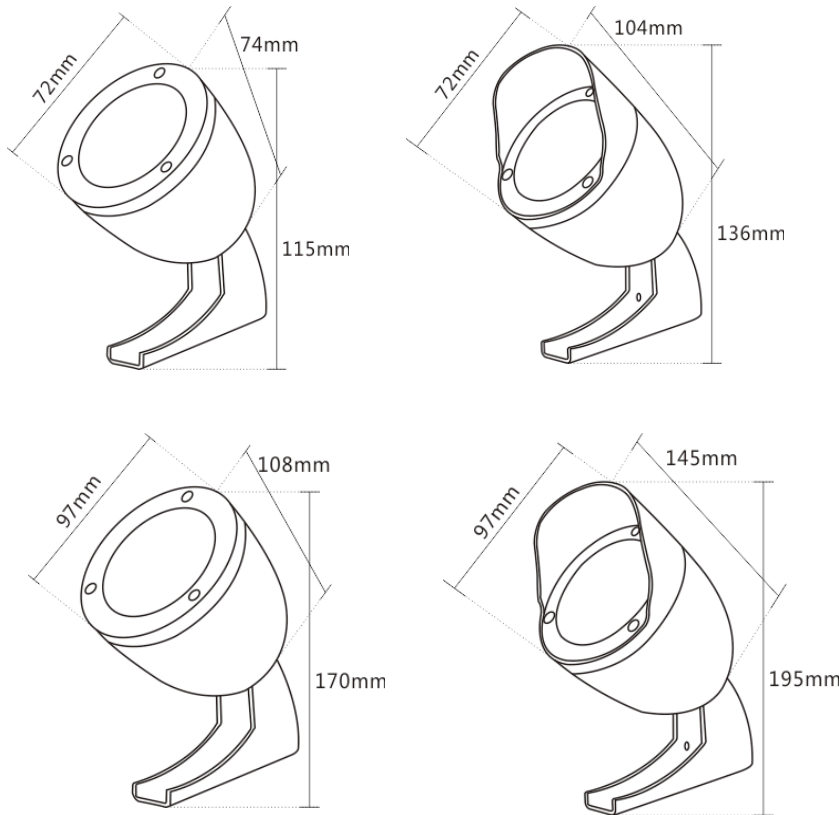

Item	Power	Quantity	Colour	Voltage	Type	Protection
TS-B6	3W	3PCS	Mono	DC24V	CREE/OSRAM	IP65
TS-B6	6W	3PCS	Mono	DC24V	CREE/OSRAM	IP65
TS-B6	6W	3PCS	RGB/RGBW	DC24V	/	IP65
TS-B7	6W	6PCS	Mono	DC24V	CREE/OSRAM	IP65
TS-B7	12W	6PCS	Mono	DC24V	CREE/OSRAM	IP65
TS-B7	12W	6PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

