




Светильник линейный
LINE LG XT-2932

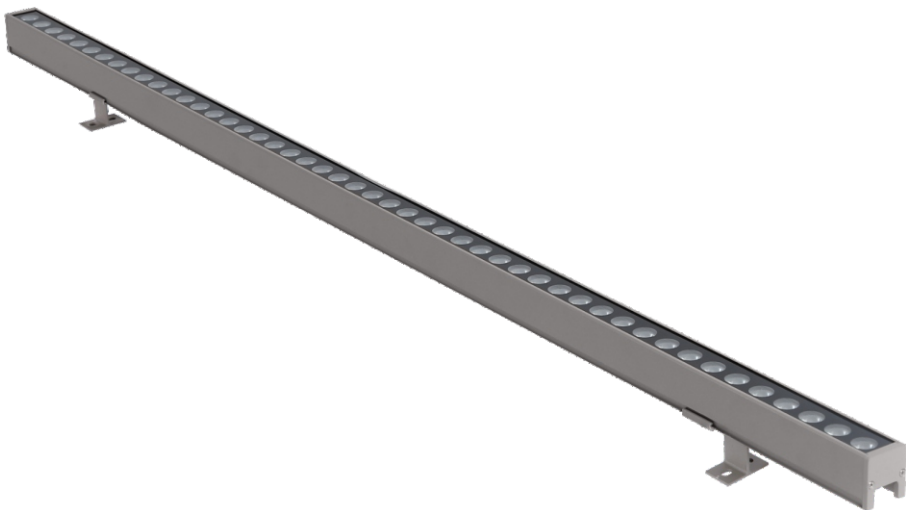

Product characteristics


- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter

- Voltage: DC24V
- Grade: I /III
- LED: CREE/OSRAM
- Drive: constant voltage
- Angle: 20°/45°/30°/60°
- Control: ON-OFF/DMX512
- Size: L1000*W35*H63mm


Applicable scenario

Building exterior wall,
green landscape, bridge

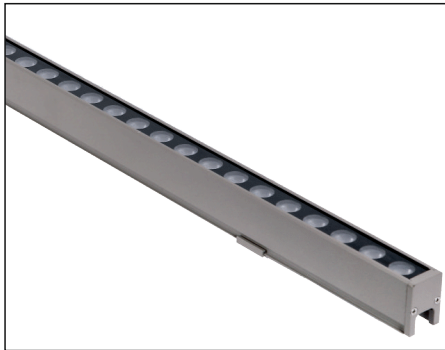

Installation size

LIGHTING
GROUP

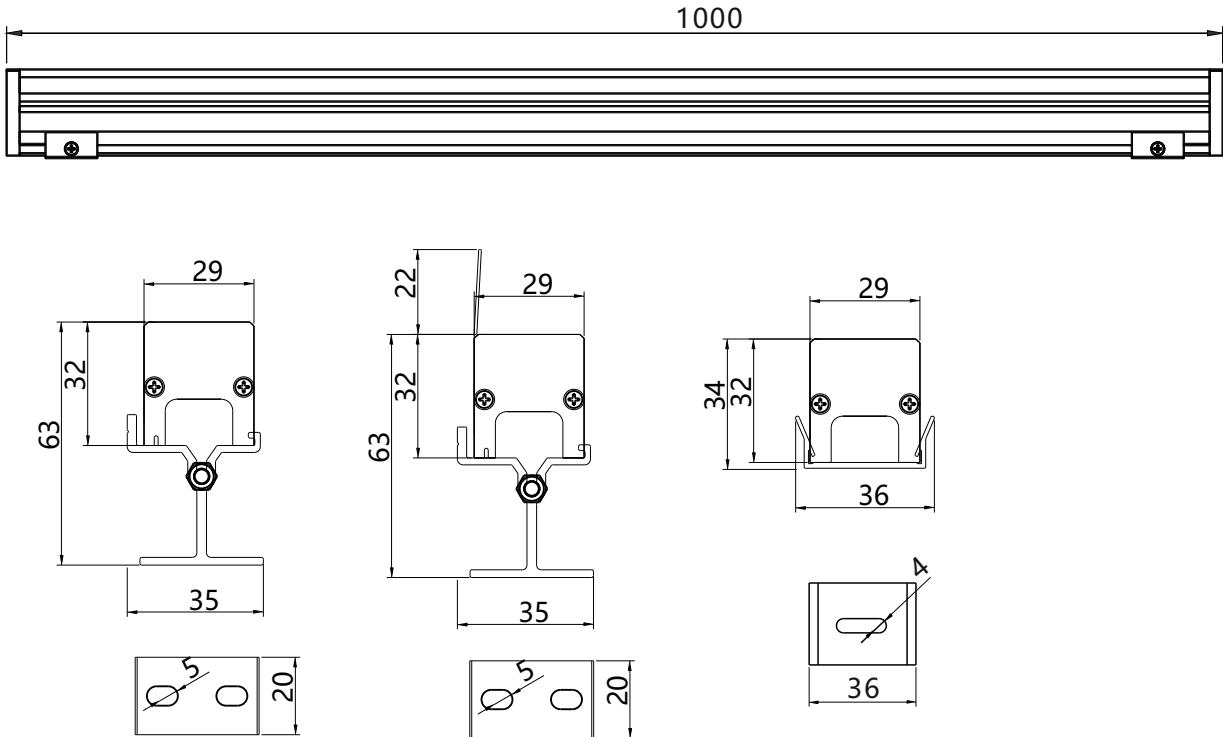

Item	Power	Quantity	Colour	Voltage	Type	Protection
XT-2932	10-15W	48PCS	Mono	DC24V	CREE/OSRAM	IP65
XT-2932	10-15W	48PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

