



Светильник ландшафтный
BURIED DM-C1/C2/C3



Product characteristics

- Structural waterproofing
- Inner cavity heat dissipation
- tempering glass transmittance>90%
- 6063aluminum alloy
- stainless steel screw
- CREE/OSRAM
- Monochrome DMX512

Technical Parameter


- Voltage: DC24V/AC220V
- Grade: I /Ⅲ
- LED: CREE/OSRAM
- Drive: constant voltage
- Angle: 8°/15°/30°/45°/60°
- Control: ON-OFF/DMX512
- Size: Ø100*H80mm

Applicable scenario

- Building exterior wall,
- green landscape, bridge



Installation size

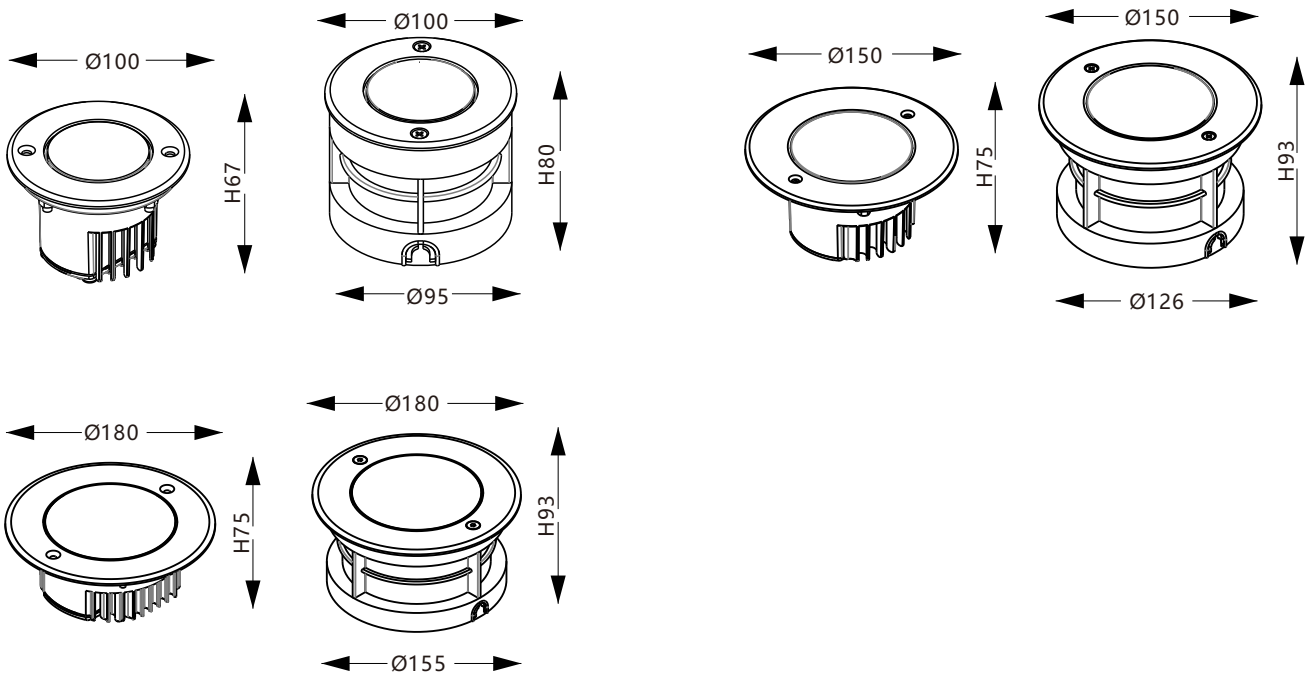

Item	Power	Quantity	Colour	Voltage	Type	Protection
DM-C1	3W	3PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
DM-C1	3W	3PCS	RGB/RGBW	DC24V	/	IP65
DM-C2	6W	6PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
DM-C2	12W	6PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
DM-C2	6W	6PCS	RGB/RGBW	DC24V	/	IP65
DM-C2	12W	6PCS	RGB/RGBW	DC24V	/	IP65
DM-C3	9W	9PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
DM-C3	12W	12PCS	Mono	DC24V/AC220V	CREE/OSRAM	IP65
DM-C3	12W	12PCS	RGB/RGBW	DC24V	/	IP65
DM-C3	24W	12PCS	RGB/RGBW	DC24V	/	IP65

Light distribution curve

